

ENSHINE Lighting
lights up your world for
love and hope

www.enshinelighting.com





Company Profile

Enshine lighting was established in 2006 to specialize in manufacturing LED lamps.

By 2026

● Factory Area
70,000 square meters


● Production Line
30 lines

● Daily Capacity
360,000pcs

Enshine Lighting has a mature product R&D, production, quality control, supply chain management system. From raw material, production line to finished-products, each process is inspected strictly by our conscientious and experienced QC auditors to ensure the stable quality and low cost.

We design, we R&D, we manufacture, we inspect, we consistently surpass customer expectations in quality, innovation, value and service.

Quality is not an option, it's an obligation!



VR Visit Factory



▲ R&D Department



▲ Manufacturing Shop




▲ Injection Workshop

**Transparent end cap
is available**



**SKD Easy assemblable
Full PC**




Bset seller


Model Number	Rated Wattage	Input Voltage	Color Temp.	Lumen(±10%)	C.R.I.	Material	Lamp Size
YX-BAN-C	20W	AC 90-265V	2700K-7000K	1800lm	>80	Full PC	300×54×40mm
YX-BAN-C	40W	AC 90-265V	2700K-7000K	3600lm	>80	Full PC	600/1200×54×40mm
YX-BAN-C	60W	AC 90-265V	2700K-7000K	5400lm	>80	Full PC	900/1200×54×40mm
YX-BAN-C	80W	AC 90-265V	2700K-7000K	7200lm	>80	Full PC	1200×54×40mm

Full PC


**Two Mounting
Solutions:
Surface & Suspension**

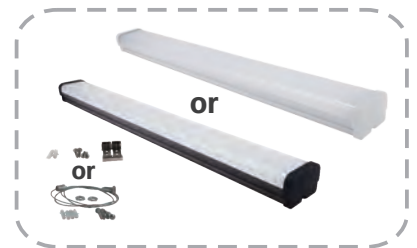

Model Number	Rated Wattage	Input Voltage	Color Temp.	Lumen(±10%)	C.R.I.	Material	Lamp Size
YX-BAN-D	20W	AC 90-265V	2700K-7000K	1800lm	>80	Full PC	600×60×40mm
YX-BAN-D	40W	AC 90-265V	2700K-7000K	3600lm	>80	Full PC	600/1200×60×40mm
YX-BAN-D	60W	AC 90-265V	2700K-7000K	5400lm	>80	Full PC	900/1200×60×40mm
YX-BAN-D	80W	AC 90-265V	2700K-7000K	7200lm	>80	Full PC	1200×60×40mm
YX-BAN-D	100W	AC 90-265V	2700K-7000K	9000lm	>80	Full PC	1200×60×40mm

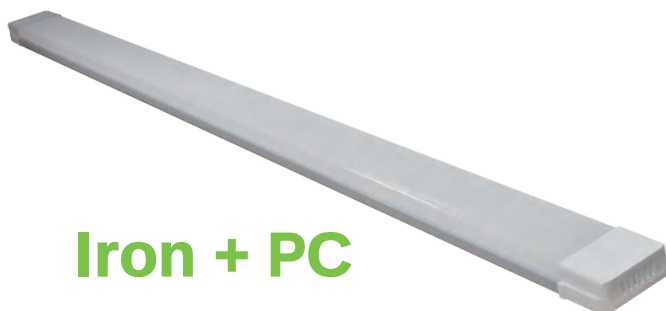


Iron + PC



Model Number	Rated Wattage	Input Voltage	Color Temp.	Luminous flux	C.R.I.	Lamp Size
YX-BAN-F	36W	AC 90-265V	2700K-7000K	85lm/w	>70	1200×62×25mm
YX-BAN-F	54W	AC 90-265V	2700K-7000K	85lm/w	>70	1200×62×25mm
YX-BAN-F	60W	AC 90-265V	2700K-7000K	85lm/w	>70	1200×75×25mm
YX-BAN-F	80W	AC 90-265V	2700K-7000K	85lm/w	>70	1200×75×25mm
YX-BAN-F	100W	AC 90-265V	2700K-7000K	85lm/w	>70	1200×95×25mm



- Philips driver
- Power is selectable
- High light efficacy

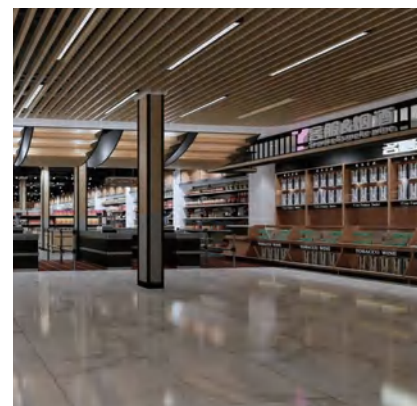


Model Number	Rated Wattage	Input Voltage	Color Temp.	Lumious Flux	Material	IP	C.R.I.	Lamp Size
YX-LNF05	25-44W	AC 90-265V	2700K-7000K	130lm/W	IRON+PC	IP20	>80	1200×73×84mm
YX-LNF05	45-65W	AC 90-265V	2700K-7000K	130lm/W	IRON+PC	IP20	>80	1200×73×84mm




ALU + PC


Full PC

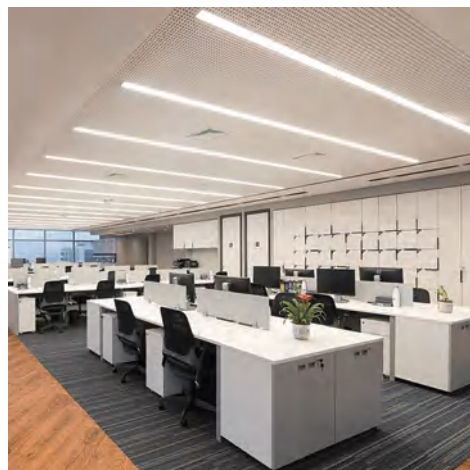


Model Number	Rated Wattage	Input Voltage	Color Temp.	Lumen(±10%)	C.R.I.	Material	Lamp Size
YX-BAN-B	20W	AC 90-265V	2700K-7000K	1800lm	>80	AL+PC	600×75×25mm
YX-BAN-B	40W	AC 90-265V	2700K-7000K	3600lm	>80	AL+PC	1200×75×25mm
YX-BAN-B	20W	AC 90-265V	2700K-7000K	1800lm	>80	Full PC	600×75×25mm
YX-BAN-B	40W	AC 90-265V	2700K-7000K	3600lm	>80	Full PC	1200×75×25mm



Model Number	Rated Wattage	Input Voltage	Color Temp.	Luminous Flux	C.R.I.	IP	Width
YX-BAN-AA	9-48W	AC 90-265V	2700K-7000K	90lm/W	>80	IP20/IP44	116mm

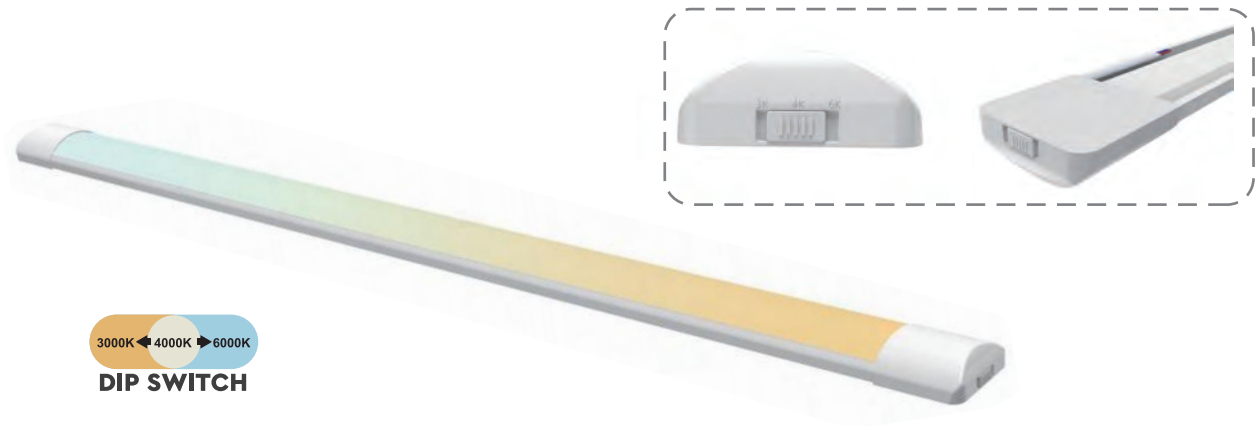

Model Number	Rated Wattage	Input Voltage	Color Temp.	Luminous flux	Material	PF	C.R.I.	Lamp Size
YX-BAN-E	18W	AC 175-265V	3CCT	120lm/W	Full PC	>0.7	>80	600×70×25mm
YX-BAN-E	36W	AC 175-265V	3CCT	120lm/W	Full PC	>0.9	>80	1200×70×25mm
YX-BAN-E	45W	AC 175-265V	3CCT	120lm/W	Full PC	>0.9	>80	1500×70×25mm

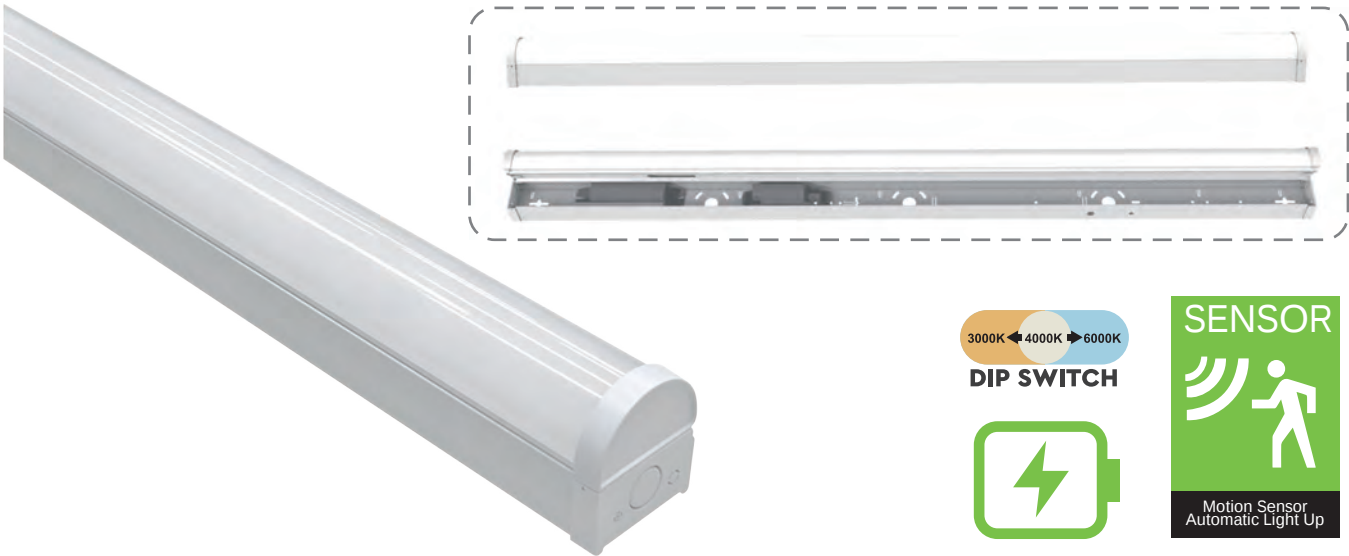

Model Number	Rated Wattage	Input Voltage	Color Temp.	Lumen(±10%)	Material	PF	C.R.I.	Lamp Size
YX-BAN-G	18W	AC 220-240V	2700-7000K	1800lm	Iron+PC	>0.9	>80	600×61×72mm
YX-BAN-G	36W	AC 220-240V	2700-7000K	3600lm	Iron+PC	>0.9	>80	1200×61×72mm
YX-BAN-G	18W	AC 220-240V	3CCT	1800lm	Iron+PC	>0.9	>80	600×61×72mm
YX-BAN-G	36W	AC 220-240V	3CCT	3600lm	Iron+PC	>0.9	>80	1200×61×72mm



Direct docking



Turn connection



Wire connection



Power Selectable




DIP SWITCH

Model Number	Rated Wattage	Input Voltage	Color Temp.	Lumen(±10%)	C.R.I.	Beam Angle	Lamp Size
YX-T5	6W	AC 90-265V	2700K-7000K	540lm	>80	180°	300×23×35mm
YX-T5	12W	AC 90-265V	2700K-7000K	1080lm	>80	180°	600×23×35mm
YX-T5	18W	AC 90-265V	2700K-7000K	1600lm	>80	180°	1200×23×35mm
YX-T5	24W	AC 90-265V	2700K-7000K	2100lm	>80	180°	1500×23×35mm

Material:

- PC/NANO
- GLASS
- AL+PC


4000LM
1.2m

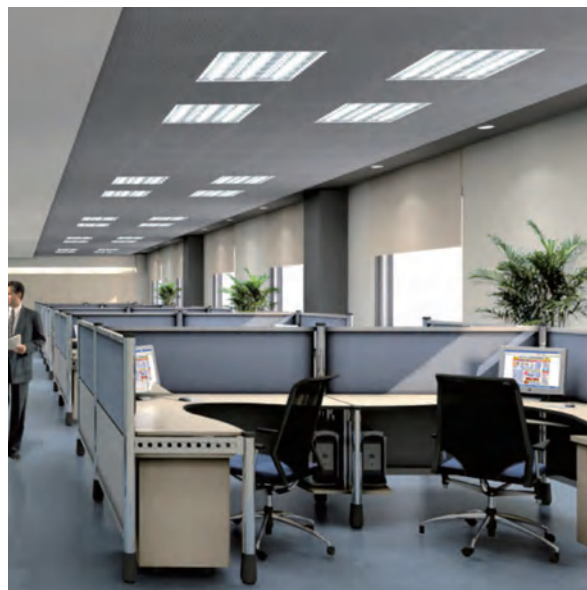


Model Number	Rated Wattage	Input Voltage	Color Temp.	Lumen(±10%)	C.R.I.	Beam Angle	Lamp Size
YX-T8	6W	AC 90-265V	2700K-7000K	540lm	>80	180°	300×29×29mm
YX-T8	12W	AC 90-265V	2700K-7000K	1080lm	>80	180°	600×29×29mm
YX-T8	18W	AC 90-265V	2700K-7000K	1600lm	>80	180°	1200×29×29mm
YX-T8	24W	AC 90-265V	2700K-7000K	2100lm	>80	180°	1500×29×29mm




- Philips driver
- Power is selectable
- High light efficacy

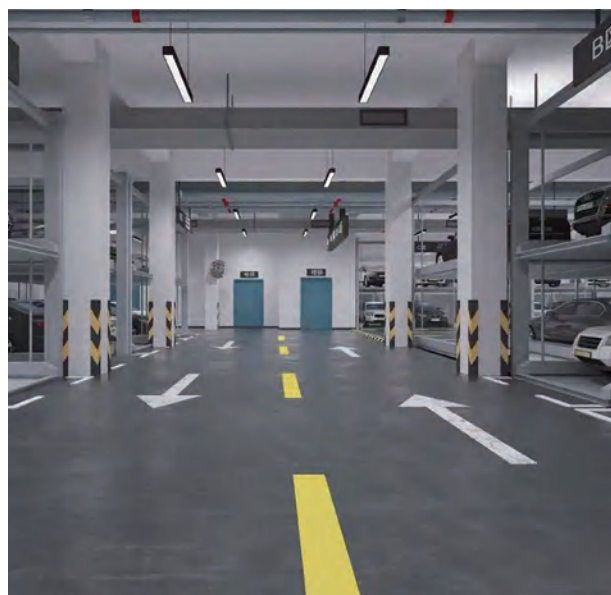

Model Number	Rated Wattage	Input Voltage	Color Temp.	Lumious Flux	Material	IP	C.R.I.	Lamp Size
YX-LNF03	25-44W	AC 165-265V	2700K-7000K	130lm/W	AL+PC	IP65	>80	1200×44×52mm
YX-LNF03	45-65W	AC 165-265V	2700K-7000K	130lm/W	AL+PC	IP65	>80	1200×44×52mm
YX-LNF04	25-44W	AC 90-265V	2700K-7000K	130lm/W	AL+PC	IP65	>80	1200×73×61mm
YX-LNF04	45-65W	AC 90-265V	2700K-7000K	130lm/W	AL+PC	IP65	>80	1200×73×61mm




Model Number	Rated Wattage	Input Voltage	Color Temp.	Lumen(±10%)	Material	IP	C.R.I.	Lamp Size
YX-LNF01	40W	AC 90-265V	2700K-7000K	4000lm	Full PC	IP65	>80	600×68×50mm
YX-LNF01	60W	AC 90-265V	2700K-7000K	6000lm	Full PC	IP65	>80	900×68×50mm
YX-LNF01	80W	AC 90-265V	2700K-7000K	8000lm	Full PC	IP65	>80	1200×68×50mm

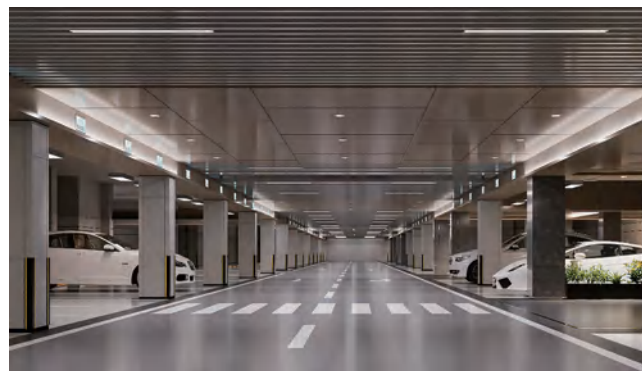

- Water Proof.
- Corrosion Proof.
- Dust Proof.



Model Number	Rated Wattage	Input Voltage	Color Temp.	Lumen(±10%)	Material	IP	C.R.I.	Lamp Size
YX-LNF02	18W	AC 90-265V	2700K-7000K	1620lm	Full PC	IP65	>80	580×62×56mm
YX-LNF02	36W	AC 90-265V	2700K-7000K	3240lm	Full PC	IP65	>80	1180×62×56mm
YX-LNF02	45W	AC 90-265V	2700K-7000K	4050lm	Full PC	IP65	>80	1480×62×56mm

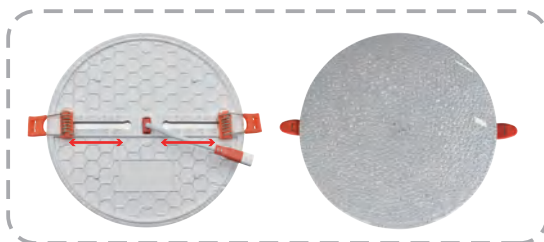

YX-SFPA



YX-RFPA



YX-SPAAS




YX-RPAAS




Model Number	Rated Wattage	Input Voltage	Color Temp.	Luminous flux	C.R.I.	Hole Size	Lamp Size	Pcs/Carton	Carton Size
YX-SFPA/RFPA	10W	AC 90-265V	2700K-7000K	90lm/w	>80	Φ55-75mm	Φ100mm	100	545×440×250mm
YX-SFPA/RFPA	18W	AC 90-265V	2700K-7000K	90lm/w	>80	Φ55-95mm	Φ120mm	60	435×440×320mm
YX-SFPA/RFPA	24W	AC 90-265V	2700K-7000K	90lm/w	>80	Φ55-155mm	Φ170mm	40	380×440×410mm
YX-SFPA/RFPA	36W	AC 90-265V	2700K-7000K	90lm/w	>80	Φ55-200mm	Φ225mm	30	735×440×265mm
YX-SPAAS/RPAAS	18W	AC 90-265V	2700K-7000K	90lm/w	>80	/	Φ120×45mm	60	540×395×275mm
YX-SPAAS/RPAAS	24W	AC 90-265V	2700K-7000K	90lm/w	>80	/	Φ170×45mm	40	540×370×380mm
YX-SPAAS/RPAAS	36W	AC 90-265V	2700K-7000K	90lm/w	>80	/	Φ225×45mm	30	720×540×250mm
YX-SPAAS/RPAAS	48W	AC 90-265V	2700K-7000K	90lm/w	>80	/	Φ300×45mm	20	640×540×330mm



Model Number	Rated Wattage	Input Voltage	Color Temp.	Lumen(±10%)	C.R.I.	Hole Size	Lamp Size	Pcs/Carton	Carton Size
YX-RPA/SPA	3W	AC 90-265V	2700K-7000K	120lm	>80	Φ75mm	Φ83mm	100	485x300x260mm
YX-RPA/SPA	6W	AC 90-265V	2700K-7000K	330lm	>80	Φ105mm	Φ120mm	100	635x300x310mm
YX-RPA/SPA	9W	AC 90-265V	2700K-7000K	540lm	>80	Φ125mm	Φ145mm	40	600x365x220mm
YX-RPA/SPA	12W	AC 90-265V	2700K-7000K	780lm	>80	Φ155mm	Φ168mm	40	600x365x220mm
YX-RPA/SPA	15W	AC 90-265V	2700K-7000K	975lm	>80	Φ175mm	Φ190mm	30	690x300x270mm
YX-RPA/SPA	18W	AC 90-265V	2700K-7000K	1260lm	>80	Φ205mm	Φ220mm	30	690x300x270mm
YX-RPA/SPA	24W	AC 90-265V	2700K-7000K	1920lm	>80	Φ280mm	Φ295mm	20	620x300x340mm
YX-RPAS/SPAS	6W	AC 90-265V	2700K-7000K	330lm	>80	/	Φ105×H28mm	60	625x340x260mm
YX-RPAS/SPAS	12W	AC 90-265V	2700K-7000K	780lm	>80	/	Φ155×H28mm	40	350x340x360mm
YX-RPAS/SPAS	18W	AC 90-265V	2700K-7000K	1260lm	>80	/	Φ205×H28mm	30	510x440x230mm
YX-RPAS/SPAS	24W	AC 90-265V	2700K-7000K	1920lm	>80	/	Φ285×H28mm	20	590x340x305mm

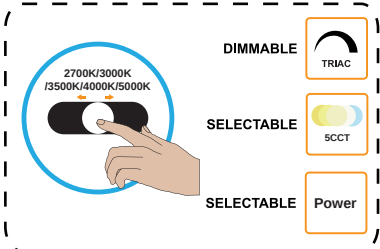

UGR: <19
Lifespan: 50,000h

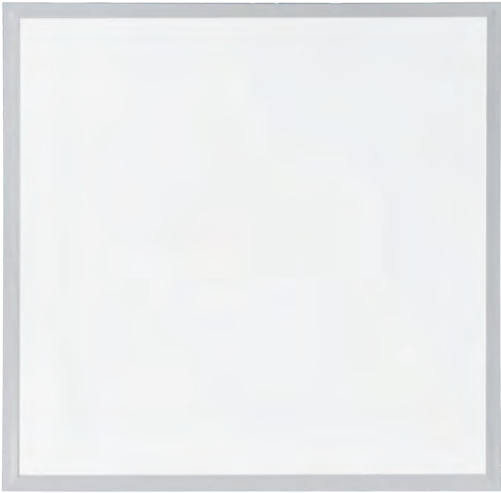

Model Number	Size	Power	Input Voltage	Color Temp.	C.R.I	Luminous flux	Pcs/Carton	Carton Size
YX-BPA	600×600mm	24W/36W/40W/ 48W/72W/96W	AC 85-265V	2700-7000K	80	100lm/W	8	650×290×650mm




- Philips driver
- UGR<19
- High light efficacy
- Thickness: 15mm


Model Number	Size	Power	Input Voltage	Color Temp.	C.R.I	Luminous flux	Pcs/Carton	Carton Size
YX-BPA	595×595×30mm	20W	AC 165-265V	2700-7000K	80	180lm/W	10	625×345×640mm
YX-BPA	600×600×10mm	36W	AC 165-265V	2700-7000K	95	100lm/W	10	625×345×640mm
YX-BPA	600×600×15mm	40W	AC 165-265V	2700-7000K	80	100lm/W	10	625×345×640mm




DOB



Model Number	Size	Power	Input Voltage	Color Temp.	C.R.I	Luminous flux	Pcs/Carton	Carton Size
YX-BPA	595×595×30mm	40W	AC 165-265V	2700-7000K	80	100lm/W	10	625×345×640mm




Model Number	Rated Wattage	Input Voltage	Color Temp.	Luminous flux	Material	C.R.I.	Lamp Size
YX-CL-U	18W	AC 165-265V	3CCT	90lm/W	PC+PS	>80	Φ218mm
YX-CL-U	24W	AC 165-265V	3CCT	90lm/W	PC+PS	>80	Φ300mm
YX-CL-U	36W	AC 165-265V	3CCT	90lm/W	PC+PS	>80	Φ380mm
YX-CL-U	48W	AC 165-265V	3CCT	90lm/W	PC+PS	>80	Φ480mm



Model Number	Rated Wattage	Input Voltage	Color Temp.	Luminous flux	Material	C.R.I.	Lamp Size
YX-CL-U	18W+4W	AC 165-265V	3CCT	90lm/W	PC+PS	>80	Φ218mm
YX-CL-U	24W+6W	AC 165-265V	3CCT	90lm/W	PC+PS	>80	Φ300mm
YX-CL-U	36W+8W	AC 165-265V	3CCT	90lm/W	PC+PS	>80	Φ380mm
YX-CL-U	48W+12W	AC 165-265V	3CCT	90lm/W	PC+PS	>80	Φ480mm



YX-DLA-C



3 installation methods



DIP SWITCH

Model Number	Rated Wattage	Input Voltage	Color Temp.	Luminous flux	C.R.I.	Hole size	Lamp Size
YX-DLA-C	5W	AC 90-265V	2700K-7000K	80lm/W	>80	75mm	Φ95mm
YX-DLA-C	7W	AC 90-265V	2700K-7000K	80lm/W	>80	75mm	Φ95mm
YX-DLA-C	9W	AC 90-265V	2700K-7000K	80lm/W	>80	105mm	Φ125mm
YX-DLA-C	12W	AC 90-265V	2700K-7000K	80lm/W	>80	105mm	Φ125mm



YX-DLS



YX-DLC



Selectable Color Temperature
Simply switch the button to change 3 colors

WW 3000K NW 4000K CW 6500K

Model Number	Rated Wattage	Input Voltage	Color Temp.	Luminous flux	C.R.I.	Hole size	Lamp Size
YX-DLC	8W	AC 90-265V	2700K-7000K	90lm/W	>80	75mm	90×73mm
YX-DLC	10W	AC 90-265V	2700K-7000K	90lm/W	>80	90mm	105×86mm
YX-DLS	5W	AC 90-265V	2700K-7000K	90lm/W	>80	70mm	92×55mm
YX-DLS	7W	AC 90-265V	2700K-7000K	90lm/W	>80	70mm	92×55mm
YX-DLS	9W	AC 90-265V	2700K-7000K	90lm/W	>80	90mm	115×60mm
YX-DLS	12W	AC 90-265V	2700K-7000K	90lm/W	>80	90mm	115×60mm



YX-DLA-A



YX-DLA-B



Model Number	Rated Wattage	Input Voltage	Color Temp.	Luminous flux	C.R.I.	Hole size	Lamp Size
YX-DLA-A	8-10W	AC 90-265V	2700K-7000K	90lm/W	>80	70-90mm	Φ85-105mm
YX-DLA-B	3-12W	AC 90-265V	2700K-7000K	90lm/W	>80	60-90mm	Φ75-113mm


Iron Material



Model Number	Rated Wattage	Input Voltage	Color Temp.	Luminous flux	C.R.I.	Hole size	Lamp Size
YX-DLA-D	8W	AC 90-265V	2700K-7000K	70lm/W	>80	75-90mm	D100×H32mm
YX-DLA-D	10W	AC 90-265V	2700K-7000K	80lm/W	>80	95-120mm	D140×H39mm
YX-DLA-D	20W	AC 90-265V	2700K-7000K	85lm/W	>80	145-170mm	D190×H39mm
YX-DLA-D	40W	AC 90-265V	2700K-7000K	85lm/W	>80	190-220mm	D240×H39mm



Model Number	Rated Wattage	Input Voltage	Color Temp.	Luminous flux	C.R.I.	Lamp Size	Pcs/Carton	Carton Size
YX-MR16-M	5W	AC 90-265V	2700K-7000K	85lm/W	>80	Φ50×H25mm	100	530x275x100mm
YX-MR16-M	8W	AC 90-265V	2700K-7000K	85lm/W	>80	Φ50×H39mm	100	530x275x130mm
YX-MR16-M	5W	AC 90-265V	3CCT	85lm/W	>80	Φ50×H25mm	100	530x275x100mm
YX-MR16-M	8W	AC 90-265V	3CCT	85lm/W	>80	Φ50×H39mm	100	530x275x130mm




Model Number	Rated Wattage	Input Voltage	Color Temp.	Luminous flux	C.R.I.	Hole size	Lamp Size
YX-DLA-E	5W	AC 165-265V	3CCT	75lm/W	>80	75mm	D95×H27mm
YX-DLA-E	7W	AC 165-265V	3CCT	75lm/W	>80	75mm	D95×H27mm
YX-DLA-E	9W	AC 165-265V	3CCT	85lm/W	>80	90mm	D115×H27mm
YX-DLA-E	12W	AC 165-265V	3CCT	90lm/W	>80	110mm	D140×H29mm
YX-DLA-E	15W	AC 165-265V	3CCT	90lm/W	>80	110mm	D140×H29mm
YX-DLA-E	18W	AC 165-265V	3CCT	90lm/W	>80	155mm	D190×H29mm
YX-DLA-E	24W	AC 165-265V	3CCT	90lm/W	>80	190mm	D230×H29mm
YX-DLA-E	28W	AC 165-265V	3CCT	90lm/W	>80	190mm	D230×H29mm



YX-BHR01

YX-BHO01



Model Number	Rated Wattage	Input Voltage	Frequency	Color Temp.	Lumen(±10%)	IP	C.R.I.	PF	Lamp Size
YX-BHR01	24W	AC 90-265V	50/60Hz	2700K-7000K	1600lm	IP54/IP65	>80	>0.5	Φ206×H50mm
YX-BHO01	24W	AC 90-265V	50/60Hz	2700K-7000K	1600lm	IP54/IP65	>80	>0.5	255×126×50mm

Full PC




YX-BHR02

YX-BHO02




Dusk to dawn



Model Number	Rated Wattage	Input Voltage	Frequency	Color Temp.	Lumen(±10%)	IP	C.R.I.	PF	Lamp Size
YX-BHR02	12W	AC 90-265V	50/60Hz	2700K-7000K	960lm	IP54/IP65	>80	>0.5	Φ160×H46mm
YX-BHR02	15W	AC 90-265V	50/60Hz	2700K-7000K	1200lm	IP54/IP65	>80	>0.5	Φ160×H46mm
YX-BHO02	12W	AC 90-265V	50/60Hz	2700K-7000K	960lm	IP54/IP65	>80	>0.5	175×84×46mm
YX-BHO02	15W	AC 90-265V	50/60Hz	2700K-7000K	1200lm	IP54/IP65	>80	>0.5	175×84×46mm



Dusk to dawn




YX-BHR04


YX-BHO04



Model Number	Rated Wattage	Input Voltage	Frequency	Color Temp.	Lumen(±10%)	IP	C.R.I.	PF	Lamp Size
YX-BHR04	8W	AC 165-265V	50/60Hz	2700K-7000K	600lm	IP54	>80	>0.5	Φ155×H47mm
YX-BHR04	15W	AC 165-265V	50/60Hz	2700K-7000K	900lm	IP54	>80	>0.5	Φ175×H47mm
YX-BHR04	20W	AC 165-265V	50/60Hz	2700K-7000K	1100lm	IP54	>80	>0.5	Φ210×H47mm
YX-BHO04	8W	AC 165-265V	50/60Hz	2700K-7000K	1300lm	IP54	>80	>0.5	160×90×47mm
YX-BHO04	15W	AC 165-265V	50/60Hz	2700K-7000K	1900lm	IP54	>80	>0.5	200×95×47mm
YX-BHO04	20W	AC 165-265V	50/60Hz	2700K-7000K	600lm	IP54	>80	>0.5	230×100×47mm

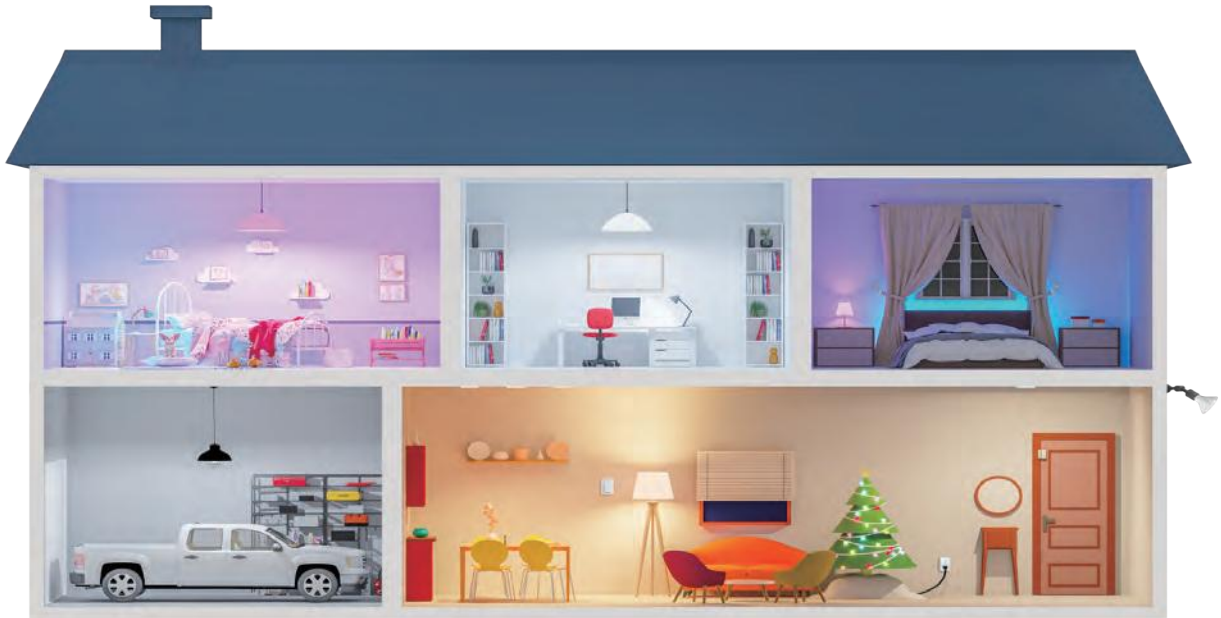

RGBCW





YX-PAR

YX-BR

YX-BU35

YX-BU31



YX-CD7

YX-BU22

YX-SPC2

YX-G45BU27

YX-GX53

YX-BU11



3-step dimming or CCT



Dimmable



Day/Night Sensor



Motion Sensor



YX-G4



YX-G9



Type-C Charging



Dimmable



USB Charge



3 Color Temperatures



Remote



Model Number	Rated Wattage	Input Voltage	Color Temp.	Lumen(±10%)	C.R.I.	Beam Angle	Lamp Size	Battery capacity	Battery voltage
YX-BU25-TC	8W	AC 90-265V	3000K/4000K/6500K	640lm	>80	150°	Φ68×H130mm	1500mAh	3.7V



YX-SPS-E



YX-BU25-E




· 3-Step dimming



Model Number	Rated Wattage	Input Voltage	Color Temp.	Lumen(±10%)	C.R.I.	Beam Angle	Lamp Size	Pcs/Carton	Carton Size
YX-BU25-E	8W	AC 90-265V	2700K-7000K	680lm	>80	210°	Φ60×H125mm	50	320x320x280mm
YX-BU25-E	10W	AC 90-265V	2700K-7000K	850lm	>80	210°	Φ70×H145mm	50	370x370x316mm
YX-BU25-E	12W	AC 90-265V	2700K-7000K	1020lm	>80	210°	Φ80×H160mm	50	420x420x340mm
YX-SPS-E	3W	AC 90-265V	2700K-7000K	250lm	>80	120°	Φ50×H56mm	100	530x270x146mm
YX-SPS-E	5W	AC 90-265V	2700K-7000K	410lm	>80	120°	Φ50×H70mm	100	530x270x174mm

IP65



Die-casting Aluminum



Model Number	Power	Input Voltage	Luminous flux (±10%)	Color Temp.	C.R.I.	IP	Material	Size
YX-FL-01	10W	AC 100-265V	100-110lm/w	6000K-6500K	>80	IP65	Die-cast Alu+PC	127×100×25mm
YX-FL-01	20W	AC 100-265V	100-110lm/w	6000K-6500K	>80	IP65	Die-cast Alu+PC	150×128×25mm
YX-FL-01	30W	AC 100-265V	100-110lm/w	6000K-6500K	>80	IP65	Die-cast Alu+PC	161×123×25mm
YX-FL-01	50W	AC 100-265V	100-110lm/w	6000K-6500K	>80	IP65	Die-cast Alu+PC	190×170×25mm
YX-FL-01	100W	AC 100-265V	100-110lm/w	6000K-6500K	>80	IP65	Die-cast Alu+PC	230×195×25mm
YX-FL-01	150W	AC 100-265V	100-110lm/w	6000K-6500K	>80	IP65	Die-cast Alu+PC	255×206×25mm
YX-FL-01	200W	AC 100-265V	100-110lm/w	6000K-6500K	>80	IP65	Die-cast Alu+PC	255×220×25mm



LED Production Base
Located in **Xiamen**



New LED Production Base
Located in **Zhangzhou**



Xiamen Enshine Lighting Co., Ltd.

Enshine (Fujian) Intelligent Electric Appliance Co., Ltd.

Add: Enshine Industrial park, No.17 Zhengxing Road, Hua'an Economic Development Zone, Zhangzhou, Fujian, China

● **International Marketing**

Tel: +86-592-5550151 Fax: +86-592-5550156

Mobile Phone: +86-18250894094

E-mail: sales206@yinxuxm.com



Wechat



Whatsapp